



Specifiche tecniche:


	MISURE	W	Lumen	AC/Hz	TEMPER.	CRI	α	TEMP. LAVORO	DURATA	FLICKER	DIMM.	CLASSE	IK	ATTACCO
IP14G10QW	Ø215*30mm	14	1300	AC180-250V Hz 50/60	3000K	80	120°	-20°+50°	25000 H	FREE	NO	II	06	G10
IP14G10QD	Ø215*30mm	14	1300	AC180-250V Hz 50/60	4000K	80	120°	-20°+50°	25000 H	FREE	NO	II	06	G10
IP14G10QC	Ø215*30mm	14	1300	AC180-250V Hz 50/60	6500K	80	120°	-20°+50°	25000 H	FREE	NO	II	06	G10
IP19G10QW	Ø300*30mm	19	1950	AC180-250V Hz 50/60	3000K	80	120°	-20°+50°	25000 H	FREE	NO	II	06	G10
IP19G10QD	Ø300*30mm	19	1950	AC180-250V Hz 50/60	4000K	80	120°	-20°+50°	25000 H	FREE	NO	II	06	G10
IP19G10QC	Ø300*30mm	19	1950	AC180-250V Hz 50/60	6500K	80	120°	-20°+50°	25000 H	FREE	NO	II	06	G10
IP29G10QW	Ø400*53mm	29	3050	AC180-250V Hz 50/60	3000K	80	120°	-20°+50°	25000 H	FREE	NO	II	06	G10
IP29G10QD	Ø400*53mm	29	3050	AC180-250V Hz 50/60	4000K	80	120°	-20°+50°	25000 H	FREE	NO	II	06	G10
IP29G10QC	Ø400*53mm	29	3050	AC180-250V Hz 50/60	6500K	80	120°	-20°+50°	25000 H	FREE	NO	II	06	G10

Circolina LED installabili facilmente.


Corpo e diffusore V2 autoestinguente e Anti-UV in policarbonato termoplastico.
Resistente agli urti.

1


MONTAGGIO



1. Scollegare la corrente elettrica.



2. Rimuovere la circolina fluorescente.



3. Se presente, rimuovere lo starter esistente.

⚠ ATTENZIONE

Si raccomanda di rivolgersi a un elettricista qualificato per installare il prodotto.


Si raccomanda di non toccare il prodotto quando è acceso.

In caso di malfunzionamento, staccare la lampada dall'alimentazione.


Si raccomanda di rivolgersi a un elettricista e di non provare a riparare la lampada da soli.

TRE MODI DI INSTALLAZIONE


Primo modo:

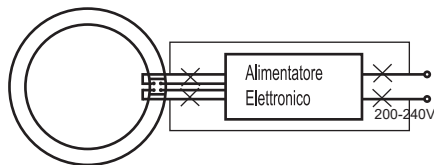


Secondo modo:

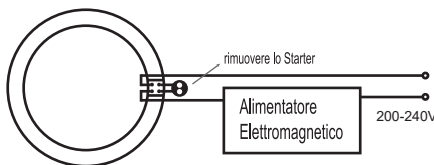

Terzo modo:



2



4. Installare la circolina inserendola nel portalampada e accendere la corrente.

Informazioni sul riciclaggio in conformità con le direttive RAAE e batterie



Simbolo sul prodotto




Simbolo sulla batteria

Solo Europa

Il prodotto/batteria è contrassegnato con uno dei simboli di riciclaggio sopra indicati. Questo indica che a fine vita il prodotto/batteria, dovrà essere smaltito/a separatamente in appropriati luoghi di raccolta e non con i normali rifiuti domestici.

CE RoHs



IPERLUX®
www.iperlux.com
info@iperlux.com



⚠ WARNING

It is recommended to contact a qualified electrician to install the product.

It is recommended not to touch the product when it is turned on.

In case of malfunction, disconnect the lamp from the power supply. It is recommended to contact an electrician and not try to repair the lamp yourself.



Specifications and Technical Data sheet :


	SIZE	W	Lumen	AC/Hz	TEMPER.	CRI	α	AMB. TEMP.	LIFETIME	FLICKER	DIMM.	CLASS	IK	LAMP HOLDER
IP14G10QW	Ø215*30mm	14	1300	AC180-250V Hz 50/60	3000K	80	120°	-20°+50°	25000 H	FREE	NO	II	06	G10
IP14G10QD	Ø215*30mm	14	1300	AC180-250V Hz 50/60	4000K	80	120°	-20°+50°	25000 H	FREE	NO	II	06	G10
IP14G10QC	Ø215*30mm	14	1300	AC180-250V Hz 50/60	6500K	80	120°	-20°+50°	25000 H	FREE	NO	II	06	G10
IP19G10QW	Ø300*30mm	19	1950	AC180-250V Hz 50/60	3000K	80	120°	-20°+50°	25000 H	FREE	NO	II	06	G10
IP19G10QD	Ø300*30mm	19	1950	AC180-250V Hz 50/60	4000K	80	120°	-20°+50°	25000 H	FREE	NO	II	06	G10
IP19G10QC	Ø300*30mm	19	1950	AC180-250V Hz 50/60	6500K	80	120°	-20°+50°	25000 H	FREE	NO	II	06	G10
IP29G10QW	Ø400*53mm	29	3050	AC180-250V Hz 50/60	3000K	80	120°	-20°+50°	25000 H	FREE	NO	II	06	G10
IP29G10QD	Ø400*53mm	29	3050	AC180-250V Hz 50/60	4000K	80	120°	-20°+50°	25000 H	FREE	NO	II	06	G10
IP29G10QC	Ø400*53mm	29	3050	AC180-250V Hz 50/60	6500K	80	120°	-20°+50°	25000 H	FREE	NO	II	06	G10

LED circline, easy to install.
ANTI-UV and V2 Self-extinguishing thermoplastic PC housing and diffusor.
Resistant to impacts.


1

THREE INSTALLATION MODE


First mode:

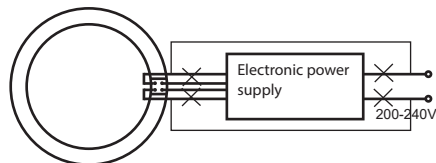

Second mode:

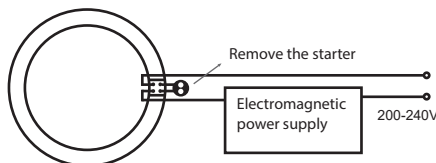


Third mode:




2


MOUNTING




1. Switch off the power.



2. Remove the fluorescent circline.



3. Remove existing starter if present.



4. Install LED Circline, insert the lamp in lampholder. Switch on the power.

Recycling Information in Accordance with the WEEE and Battery Directives



Product Mark




Battery Mark

Europe only

The product/battery is marked with one of the above recycling symbols. It indicates that at the end of the life of the product/battery, you should dispose of it separately at an appropriate collection point and not place it in normal domestic waste stream.

CE RoHs



IPERLUX®
www.iperlux.com
info@iperlux.com