



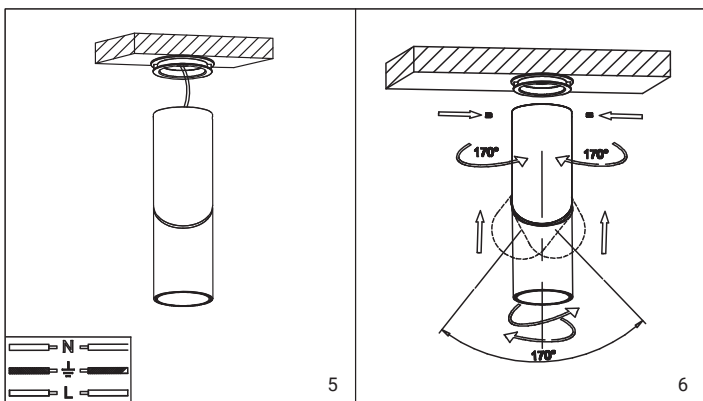

Specifiche tecniche:

Codice:	IPC15RB	IPC15RN
Finitura:	Bianco	Nero
Voltaggio:	220-240V	
Max W:	50W	
Attacco:	GU10	
Classe:	I	
Temp. ambientale:	-25°C +50°C	
Orientabile:	Sì	
Materiale:	Alluminio	
Dimensioni:	59,5x200mm	

Corpo in alluminio V2 autoestinguente. Disponibile in due finiture: bianca e nera.

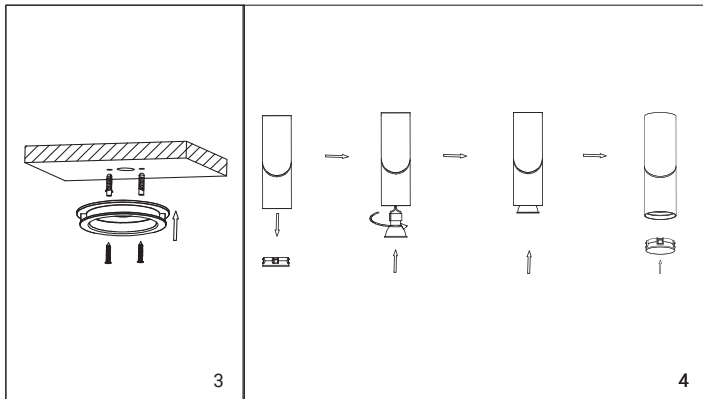

⚠ ATTENZIONE

Si prega di leggere attentamente il manuale utente prima di installare o utilizzare il prodotto.


Si raccomanda di non toccare il prodotto quando è acceso.

In caso di malfunzionamento, staccare la lampada dall'alimentazione.

Si raccomanda di rivolgersi a un elettricista e di non provare a riparare la lampada da soli.

MONTAGGIO:

1. Spegner l'alimentazione.
2. Realizzare i fori e fissare la staffa.
3. Montare la lampada e collegare i cavi.
4. Orientare il prodotto in base alla posizione desiderata.
5. Accendere il prodotto solo dopo aver ultimato l'installazione.

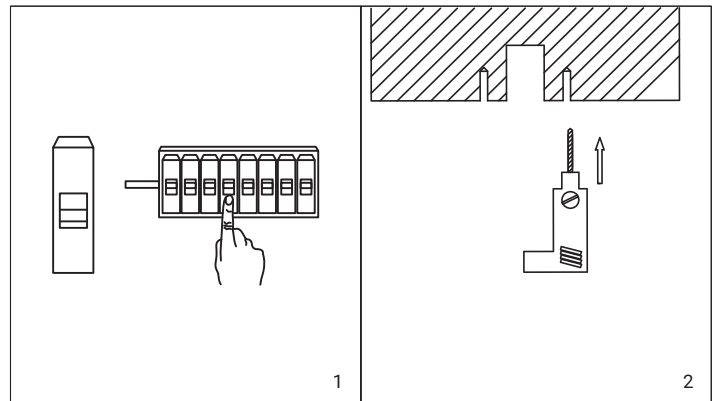

1

2

Informazioni sul riciclaggio in conformità con le direttive RAAE e batterie



Simbolo sul prodotto



Simbolo sulla batteria

Solo Europa

Il prodotto/batteria è contrassegnato con uno dei simboli di riciclaggio sopra indicati. Questo indica che a fine vita il prodotto/batteria, dovrà essere smaltito/a separatamente in appropriati luoghi di raccolta e non con i normali rifiuti domestici.

CE RoHS



IPERLUX®
www.iperlux.com
info@iperlux.com



⚠ WARNING

It is recommended to contact a qualified electrician to install the product.

It is recommended not to touch the product when it is turned on.

In case of malfunction, disconnect the lamp from the power supply. It is recommended to contact an electrician and not try to repair the lamp yourself.




MOUNTING:

1. Turn off the power.
2. Make the holes and fix the bracket.
3. Set up the lamp and connect the cables.
4. Orient the product according to the desired position.
5. Turn on the product only after the installation is complete.

Specifications and Technical Data sheet:

Code:	IPC15RB	IPC15RN
Finish:	White	Black
Voltage:	220-240V	
Max W:	50W	
Bulb:	GU10	
Class:	I	
Amb. temperature:	-25°C +50°C	
Adjustable:	Yes	
Material:	Aluminium	
Size:	59,5x200mm	

V2 self-extinguishing aluminium body. Available in two finishes: white and black.

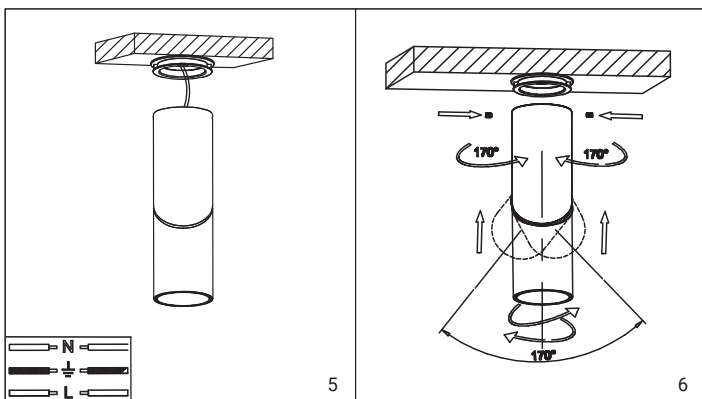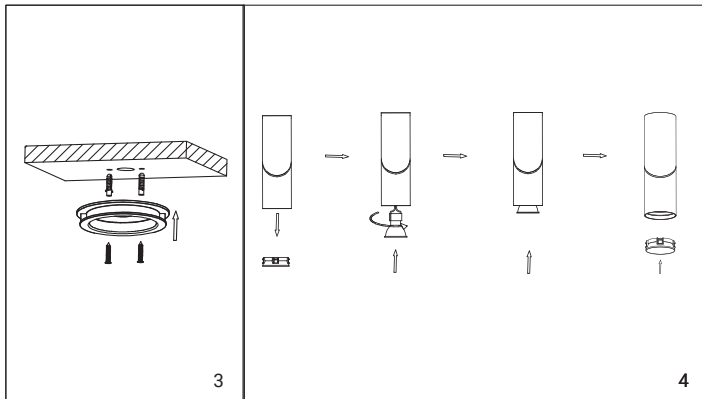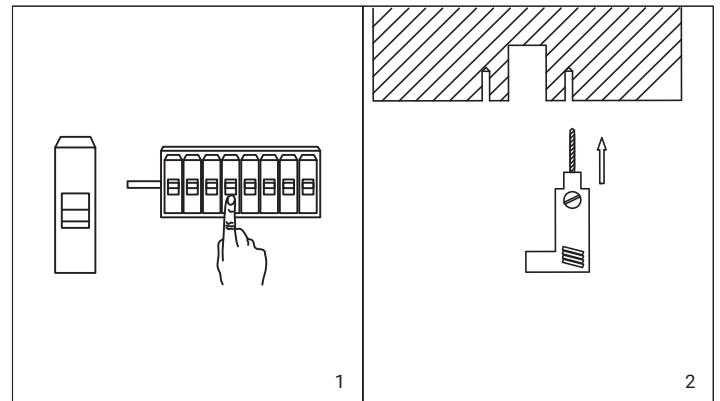

Recycling Information in Accordance with the WEEE and Battery Directives



The product/battery is marked with one of the above recycling symbols. It indicates that at the end of the life of the product/battery, you should dispose of it separately at an appropriate collection point and not place it in normal domestic waste stream.

