

MANUALE D'ISTRUZIONI PLAFONIERA STAGNA LED SMD IP65



Specifiche tecniche:

	MISURE	W	AC/Hz	CRI	3CCT	TEMP LAVORO	IP	IK	CLASSE
IP35TS20S	1200*76*68mm	24W	AC220-240V Hz 50/60	80	3000K/4000K/6500K	-15°+45°	65	08	I
IP56TS20S	1200*99*70mm	48W	AC220-240V Hz 50/60	80	3000K/4000K/6500K	-15°+45°	65	08	I
IP70TS20S	1500*99*70mm	56W	AC220-240V Hz 50/60	80	3000K/4000K/6500K	-15°+45°	65	08	I

Corpo in policarbonato, Diffusore opale V2 autoestinguente e Anti-UV in policarbonato resistente alla prova del filo incandescente per 850°C. Cavo consigliato: H05RN-3x1.0mm²/H07RN-3x1.0mm² (non usare cavi in PVC).


⚠ ATTENZIONE

Si raccomanda di rivolgersi a un elettricista qualificato per installare il prodotto.


Si raccomanda di non toccare il prodotto quando è acceso.

In caso di malfunzionamento, staccare la lampada dall'alimentazione. Si raccomanda di rivolgersi a un elettricista e di non provare a riparare la lampada da soli.

MONTAGGIO




Effettuare i fori sul soffitto seguendo le indicazioni.




	A	B
24W	860mm	26mm
48W	860mm	26mm
56W	1120mm	26mm

Collegare il cavo di alimentazione al terminale:
Filo marrone a (L); filo blu a (N) e filo verde/giallo al centro.
Nota: Il filo verde/giallo deve avere una lunghezza superiore agli altri.

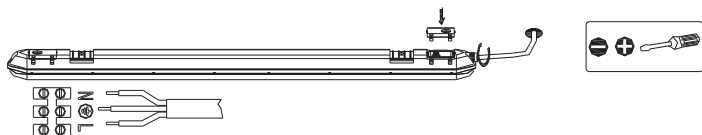

Fissare la plafoniera al soffitto.

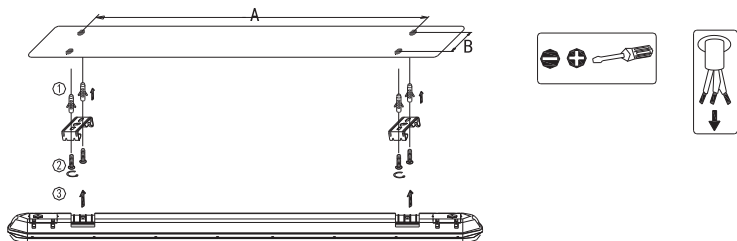

ACCESSORI COMPATIBILI (non inclusi):



IPSPD10KV

Scaricatore di sovratensione
IP68 10KV



IPSPD

Connettore IP68

Informazioni sul riciclaggio in conformità con le direttive RAAE e batterie



Simbolo sul prodotto




Simbolo sulla batteria

Solo Europa

Il prodotto/batteria è contrassegnato con uno dei simboli di riciclaggio sopra indicati. Questo indica che a fine vita il prodotto/batteria, dovrà essere smaltito/a separatamente in appropriati luoghi di raccolta e non con i normali rifiuti domestici.

CE RoHs



IPERLUX®
www.iperlux.com
info@iperlux.com



⚠ WARNING

It is recommended to contact a qualified electrician to install the product.

It is recommended not to touch the product when it is turned on.



In case of malfunction, disconnect the lamp from the power supply. It is recommended to contact an electrician and not try to repair the lamp yourself.

INSTRUCTION MANUAL

LED CEILING LAMP IP65



MOUNTING




Specifications and Technical Data sheet:

	SIZE	W	AC/Hz	CRI	3CCT	AMB. TEMPER.	IP	IK	CLASS
IP35TS20S	1200*76*68mm	24W	AC220-240V Hz 50/60	80	3000K/4000K/6500K	-15°+45°	65	08	I
IP56TS20S	1200*99*70mm	48W	AC220-240V Hz 50/60	80	3000K/4000K/6500K	-15°+45°	65	08	I
IP70TS20S	1500*99*70mm	56W	AC220-240V Hz 50/60	80	3000K/4000K/6500K	-15°+45°	65	08	I

Body in PC, opal V2 self-extinguishing and Anti-UV cover in PC, glow wire tested at 850°C.


Recommended cable: H05RN-3x1.0mm²/H 07RN-3x1.0mm² (don't use PVC cables).

Make holes in the ceiling following the directions.



	A	B
24W	860mm	26mm
48W	860mm	26mm
56W	1120mm	26mm

Connect supply lead with terminal:
Brown wire to (L); Blue wire to (N) and Green/Yellow in the middle.
Note: the Green/Yellow lead must be longer than brown and blue lead.

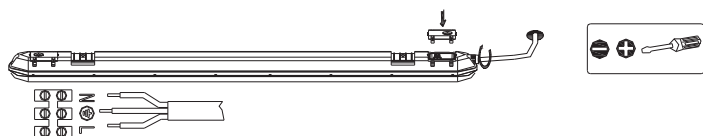

SUITABLE ACCESSORIES (not included):



IPSPD10KV


Surge protection IP68 10KV



IPSPD

Connector IP68

Attach the ceiling light to the ceiling.

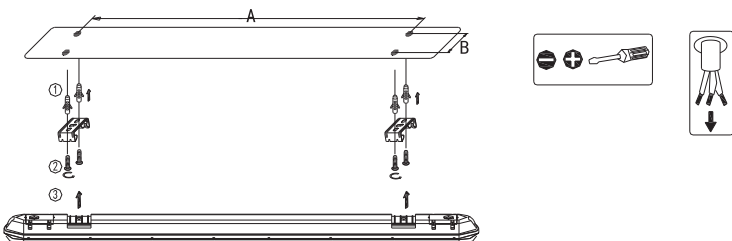

Recycling Information in Accordance with the WEEE and Battery Directives



Product Mark




Battery Mark

Europe Only

The product/battery is marked with one of the above recycling symbols. It indicates that at the end of the life of the product/battery, you should dispose of it separately at an appropriate collection point and not place it in normal domestic waste stream.

CE RoHS



IPERLUX®
www.iperlux.com
info@iperlux.com