

IPERLUX®


ARMATURA STRADALE/STREET LIGHT **IP60STS/IP100STS**



MANUALE D'ISTRUZIONI/INSTRUCTION MANUAL

Italiano 3-6/English 7-10

MANUALE D'ISTRUZIONI

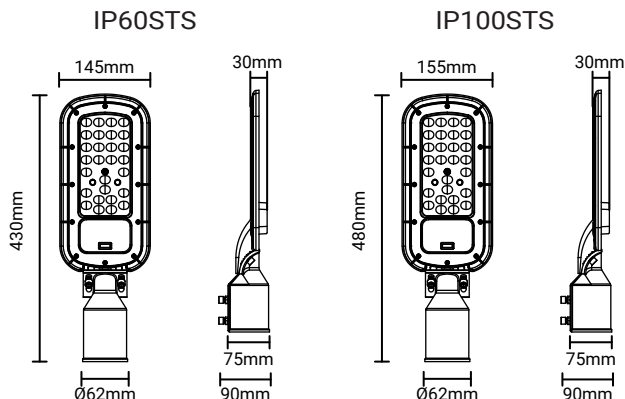

Specifiche tecniche:

Codice:	IP60STS	IP100STS
Potenza:	60W	100W
Potenza:	6000W	10100W
Voltaggio:	AC 175-265V 50/60Hz	
Switch 3CCT:	Sì	
Sorgente 3CCT:	3000K,4000K,6500K	
CRI:	80	
Temperatura di lavoro:	-40°C<TA<50°C	
Protezione sovratensione:	3KV	
Dimmerabile:	No	
Grado IP:	IP65	
Grado IK:	IK08	
Classe:	I	
Materiale:	Corpo in alluminio e lente in PC	

⚠ ATTENZIONE

Prima dell'installazione si raccomanda di verificare che l'alimentatore sia spento, di leggere le istruzioni e di preparare gli attrezzi necessari per il montaggio (non inclusi).

Se il cavo o il filo sono danneggiati, potranno essere sostituite solamente dal produttore o da un servizio assistenza o da una persona qualificata per evitare pericoli.

La sorgente luminosa contenuta in questo prodotto può essere sostituita solamente dal produttore o da un servizio assistenza o da una persona qualificata per evitare pericoli.

Il prodotto deve essere installato a una distanza tale da garantire una distanza tra l'occhio umano e la sorgente luminosa di almeno 0.3 m.

Per ridurre il rischio di strangolamento il filo flessibile deve essere ben fissato al soffitto.


Questo prodotto non è adatto alle seguenti situazioni:

- 1) Temperature di lavoro non comprese tra quelle indicate nelle specifiche tecniche.
- 2) 24 ore di accensione continua;
- 3) Voltaggi non compresi tra quelli indicati nelle specifiche tecniche.

Se usato in queste situazioni, il prodotto verrà compromesso e non soddisferà più i requisiti di garanzia.


Se si installa il prodotto in ambienti esterni si raccomanda di aggiungere una protezione SPD per aumentare la resistenza del prodotto all'impatto delle sovratensioni da fulmini.

⚠ ATTENZIONE



Utilizzare una scatola di giunzione impermeabile (non inferiore IP65) per collegare il cavo di alimentazione o assicurarsi che i cavi siano dotati di trattamento a tenuta stagna.

NB: la scatola non è inclusa.



5. Accendere l'alimentazione e verificare che l'installazione sia corretta. (fig.8)

ACCESSORI COMPATIBILI (non inclusi):



IPSPD10KV

Scaricatore di sovratensione IP68 10KV



IPSPD

Connettore IP68

Informazioni sul riciclaggio in conformità con le direttive RAAE e batterie



Simbolo sul prodotto



Simbolo sulla batteria

Solo Europa


Il prodotto/batteria è contrassegnato con uno dei simboli di riciclaggio sopra indicati. Questo indica che a fine vita il prodotto/batteria, dovrà essere smaltito/a separatamente in appropriati luoghi di raccolta e non con i normali rifiuti domestici.



ERP



INSTRUCTION MANUAL

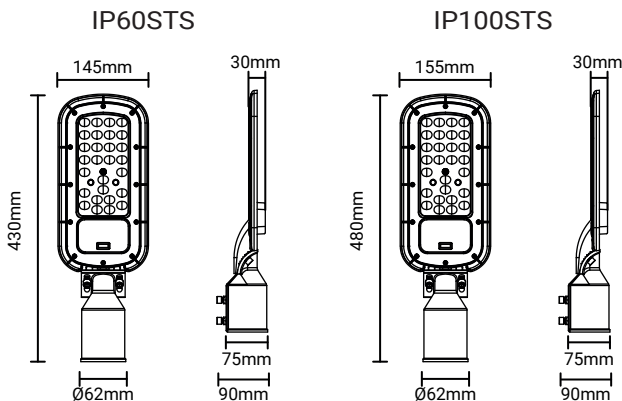

Specifications and Technical Data sheet:

Code:	IP60STS	IP100STS
Power:	60W	100W
Lumen:	6000W	10100W
Voltage:	AC 175-265V 50/60Hz	
CCT switch:	Si	
Rated CCT:	3000K,4000K,6500K	
CRI:	80	
Ambient temperature:	-40°C<TA<50°C	
Surge protection:	3KV	
Dimmable:	No	
IP Grade:	IP65	
Grado IK:	IK08	
IK Grade:	I	
Material:	Die casting Aluminium & PC Lens	

⚠ WARNING

Before installation, ensure that the power supply is turned off and read all instructions below, and users should prepare necessary accessories and spare parts (not provided).

If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.

The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.

The luminaire should be positioned so that prolonged staring into the luminaire at a distance closer than 0.3 m is not expected.


To reduce the risk of strangulation the flexible wiring connected to this luminaire shall be effectively fixed to the wall if the wiring is within arm's reach.

This product is not suitable for the following situations:

- 1). Working at temperatures close to or even exceeding the upper or lower limits for extended periods of time;
 - 2). 24 hours of continuous working;
 - 3). The input voltage operates above or below the rated voltage range;
- If used in these situations, the product will be compromised and will no longer meet the warranty requirements.

When installing lamps on outdoor high poles or other outdoor high place, it is recommended to add SPD at the input end to increase the product's resistance to lightning surge impact.


⚠ WARNING:




Use waterproof junction box (not less than IP65) to connect the power cord or make sure the wires with watertight treatment.

Note: Junction box is not provided.




MOUNTING:




1. Do not mount a surface prone to vibrations.
2. Toggle the toggle code to turn on the light to adjust the colour temperature, note that for safety, please carry out this operation after power off. (see fig.2)



3. Adjust the floodlight to desired position and tighten the screw of fixing bracket..Connect your mains cable(H05RN-F3G1.0mm² Recommended) with the input lead of our product through the waterproof junction box. Note the Line(-) of the lead. (see fig.3)



4. Adjust the lamp Angle and install it in the right position, Attach the fixing bracket to the light pole with suitable screws (see fig.5,6,7).



5. Turn on the power and check that the installation is correct (see fig.8)

SUITABLE ACCESSORIES (non included):



IPSPD10KV
Surge protector IP68 10KV



IPSPD
Connector IP68

Recycling Information in Accordance with the WEEE and Battery Directives



Product Mark



Battery Mark

Europe Only

The product/battery is marked with one of the above recycling symbols. It indicates that at the end of the life of the product/battery, you should dispose of it separately at an appropriate collection point and not place it in normal domestic waste stream.

IPERLUX®



www.iperlux.com
info@iperlux.com