



# CIRCOLINE LED MODULO

Sorgente 3CCT (3000K/4000K/6500K).  
 Voltaggio 180-250V.  
 Corpo e cover in policarbonato autoestinguente V2.  
 Resistente alla prova del filo incandescente per 650°C.

CCT source (3000K/4000K/6500K).  
 Voltage 180-250V.  
 V2 self-extinguishing PC housing and cover.  
 Glow wire tested at 650°C.

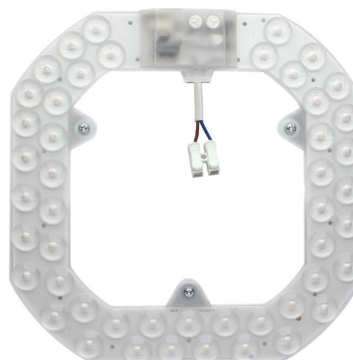

| LED LAMP | IP | AC       | α    | CRI | PF  | HOURS  | TEMP     | IK |                                                                                                                                                                         |
|----------|----|----------|------|-----|-----|--------|----------|----|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|          | 20 | 180-250V | 120° | >80 | 0,5 | 25.000 | -20+50°C | 06 |   |



|             |         |
|-------------|---------|
| Temperatura | 3CCT    |
| Potenza     | 25W     |
| Lumen       | 3880 Lm |
| Confezione  | 40 pz   |

Codice  
 ○ IP25MOS

