

### ATTENZIONE



Si raccomanda di rivolgersi a un elettricista qualificato per installare il prodotto.

Si raccomanda di non toccare il prodotto quando è acceso.

In caso di malfunzionamento, staccare la lampada dall'alimentazione.

Si raccomanda di rivolgersi a un elettricista e di non provare a riparare la lampada da soli.

### MONTAGGIO

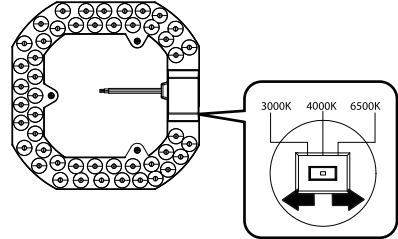

### Specifiche tecniche:

	MISURE	W	Lumen	AC/Hz	SWITCH 3CCT	CRI	α	TEMP. LAVORO	DURATA	FLICKER	IK	CLASSE
IP20MOS	133*22mm	20	2400	AC180-250V Hz 50/60	3000/4000/6500K	80	120°	-20°+50°	25000 H	FREE	06	II
IP25MOS	193*22mm	25	3880	AC180-250V Hz 50/60	3000/4000/6500K	80	120°	-20°+50°	25000 H	FREE	06	II
IP50MOS	253*22mm	50	6000	AC180-250V Hz 50/60	3000/4000/6500K	80	120°	-20°+50°	25000 H	FREE	06	II

Corpo e cover V2 autoestinguente e Anti-UV in policarbonato.  
Resistente agli urti.

1

2

### Informazioni sul riciclaggio in conformità con le direttive RAAE e batterie



Simbolo sul prodotto






Simbolo sulla batteria

Solo Europa

Il prodotto/batteria è contrassegnato con uno dei simboli di riciclaggio sopra indicati. Questo indica che a fine vita il prodotto/batteria, dovrà essere smaltito/a separatamente in appropriati luoghi di raccolta e non con i normali rifiuti domestici.

CE RoHs  






### ⚠ WARNING



It is recommended to contact a qualified electrician to install the product.

It is recommended not to touch the product when it is turned on.

In case of malfunction, disconnect the lamp from the power supply. It is recommended to contact an electrician and not try to repair the lamp yourself.



### MOUNTING

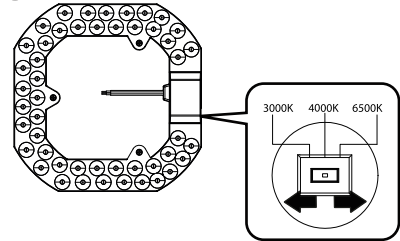



### Specifications and Technical Data sheet :

	SIZE	W	Lumen	AC/Hz	SWITCH CCT	CRI	α	AMB. TEMP.	LIFETIME	FLICKER	IK	CLASS
IP20MOS	133*22mm	20	2400	AC180-250V Hz 50/60	3000/4000/6500K	.80	120°	-20°+50°	25000 H	FREE	06	II
IP25MOS	193*22mm	25	3880	AC180-250V Hz 50/60	3000/4000/6500K	.80	120°	-20°+50°	25000 H	FREE	06	II
IP50MOS	253*22mm	50	6000	AC180-250V Hz 50/60	3000/4000/6500K	.80	120°	-20°+50°	25000 H	FREE	06	II

ANTI-UV and V2 Self-extinguishing PC housing and diffusor.  
Resistant to impacts.

1

2



### Recycling Information in Accordance with the WEEE and Battery Directives



Product Mark




Battery Mark

Europe only

The product/battery is marked with one of the above recycling symbols. It indicates that at the end of the life of the product/battery, you should dispose of it separately at an appropriate collection point and not place it in normal domestic waste stream.

CE RoHS



**IPERLUX®**  
www.iperlux.com  
info@iperlux.com