



CIRCOLINE LED MODULO

Sorgente 3CCT (3000K/4000K/6500K).
 Voltaggio 180-250V.
 Corpo e cover in policarbonato autoestinguente V2.
 Resistente alla prova del filo incandescente per 650°C.

CCT source (3000K/4000K/6500K).
 Voltage 180-250V.
 V2 self-extinguishing PC housing and cover.
 Glow wire tested at 650°C.

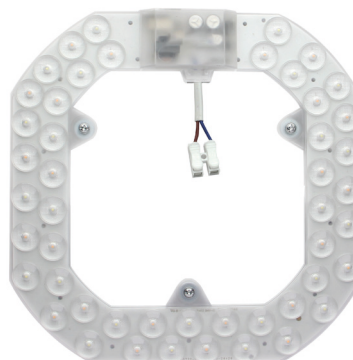

LED LAMP	IP	AC	α	CRI	PF	HOURS	TEMP	IK	
	20	180-250V	120°	>80	0,5	25.000	-20+50°C	06	 



Temperatura	3CCT
Potenza	50W
Lumen	6000 Lm
Confezione	20 pz

Codice
 ○ IP50MOS

